



N Male Right Angle Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, O-Ring and compression sealing

Product Description

Radio Frequency Systems line of high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to CELLFLEX® coaxial cables.

All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications.

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.;



OMNI FIT™ Premium Connectors

Features/Benefits

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

Technical Specifications

Transmission Line Type	Coaxial Cable
Cable Size	1/4"
Cable Type	Foam Dielectric
Model Series	LCF14-50 Series
Connector Interface	N
Nominal Impedance, ohms	50
Connector Type	OMNI FIT™ PREMIUM Right Angle
Sealing Method	O-Ring
Gender	Male
Plating Outer/Inner	NiTIn/Silver
Length, mm (in)	54 (2.13)
Outer Diameter, mm (in)	47.2 (1.86)
Weight, kg (lb)	0.14 (0.31)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	360° clamping
3rd Order IM Product @ 2x20 Watts, dBc	-156 ; typical -162
Maximum Frequency, GHz	3.7
VSWR (Return Loss, dB)	0 < f = 1.0 GHz: 1.04 (34.1) 1.0 < f = 2.0 GHz: 1.06 (30.7) 2.0 < f = 2.7 GHz: 1.08 (28.3) 2.7 < f = 3.7 GHz: 1.10 (26.4)
Wrench size front, mm (in)	22 (7/8)
Wrench size rear, mm (in)	18 (7/10)
Waterproof Level	IP68


Notes

Other Documentation

Installation Instruction: [1000008147-01.pdf](http://www.rfsworld.com/1000008147-01.pdf)



N Male Right Angle Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, O-Ring and compression sealing

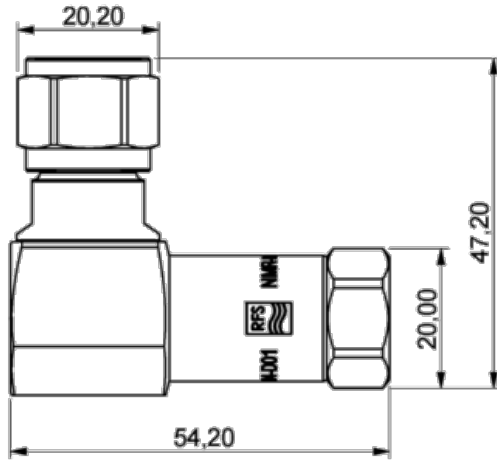

All information contained in the present datasheet is subject to confirmation at time of ordering